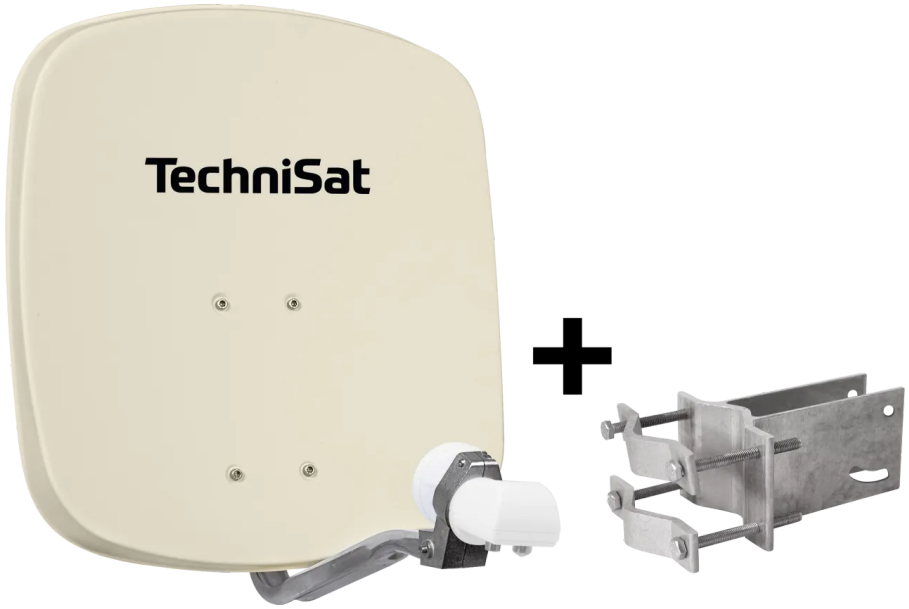


DIGIDISH 45 with Universal-Twin-LNB, incl. on-pipe fitting

Thanks to its ingenious reflector design the reception performance of the DigiDish 45 is better than with many 60 cm mirrors - and that is with a far lower size of reflector.

Colour	EAN	Item no.	Weight (Box)	Weight
Smiley/Gelb	4019588543829	1545/3882	3,7 kg	2,9 kg
brick/red	4019588443822	1445/3882	3,7 kg	2,9 kg
polar white	4019588753822	1745/3882	3,7 kg	2,9 kg
slate/grey	4019588353824	1345/3882	3,7 kg	2,9 kg
beige	4019588053823	1045/3882	3,7 kg	2,9 kg

TOP FEATURES

- Only 45 cm small
- 1 or 2 participants
- 1 orbital position (for example Astra 19.2 ° East)
- Especially suitable for balcony installation / Ideal for the city
- Ideal for ground and wall mounting
- incl. on-pipe fitting

LOCAL OSCILLATOR

- Low band: 9,75 GHz
- High band: 10,7 GHz

LNB CONTROL

- Vertical: 11,5 - 14 V
- Horizontal: 16 - 19 V
- Band switch: 22 kHz

GENERAL CHARACTERISTICS

- Material: Aluminium
- Material strength: 1 mm
- Coating: Powder-coated on both sites
- Colour: beige, polar white, slate-grey, brick-red
- including Wall bracket: Yes

INPUT FREQUENCY RANGE

Low band: 10,7 ... 11,7 GHz

High band: 11,7 ... 12,75 GHz

NOISE FACTOR

Lower frequency range: 0,7 dB max.

Upper frequency range: 0,7 dB max.

OUTPUT FREQUENCY RANGE

Low band: 950 - 1.950 MHz

High band: 1.100 - 2.150 MHz

POWER SUPPLY

LNB voltage supply: 11,5 ... 19 V

Power consumption: max. 190 mA

TECHNICAL DATA

Rated measurement: 0,45 m

F/D: 0,6

Offset angle: 30 °

Gain: 32,2 dBi @11,3 GHz

Feed reception: 40 mm

SCOPE OF DELIVERY

Satellite Dish

LNB

Screws

Tool

On-pipe fitting

Wall Mount

Installation instructions